

PROJECT FLOORS The Pinnacles

SPECIFICATIONS


Product Type	LOOP
Fiber Composition	100% Nylon (Polyamide 6)
Dye Method	Solution Dyed
Pile Weight	800 g/m ²
Number of Tufts	252160/m ²
Machine Gauge	1/10"
Primary Backing	Non-Woven
Secondary Backing	Cushion Back - 800gsm
Tile Size	50 cm x 50 cm (19.6" x 19.6")
Pile Height	4.0 mm
Total Tile Height	9.0 mm
Pile Treatment	UV Treated Yarn & Walk Of Fame
Recommended Installation	Quarter Turn or Brick



Performance Specifications

VOC Emission	ASTM D5116-17	<0.5 mg/m ² /hour (CRI GLP)
Flammability	ASTM D-2859//FF 1-70//16CFR 1630	Pass 8/8
Critical Radiant Flux	ASTM E648-17	Class I
Static Propensity	AATCC 134-2011	0.2 kV
Color Fastness	AATCC/16	5/5 on Grey Scale
Thermal Resistance	DIN 52612	.04m ² K/W
Impact Sound Insulation	ISO 140-8	ΔLw 23dB
Sound Absorption Level	EN ISO 354	αω: 0.15(H)
Soiling Propensity	ASTM D 6540-00	4
Dimensional Stability	EN 986	< 0.20%
Castor Chair Test	ISO 4918	Rating 4.0

The above Information is subject to modification for the benefit of further improvement. Manufacturing tolerance: ±5%

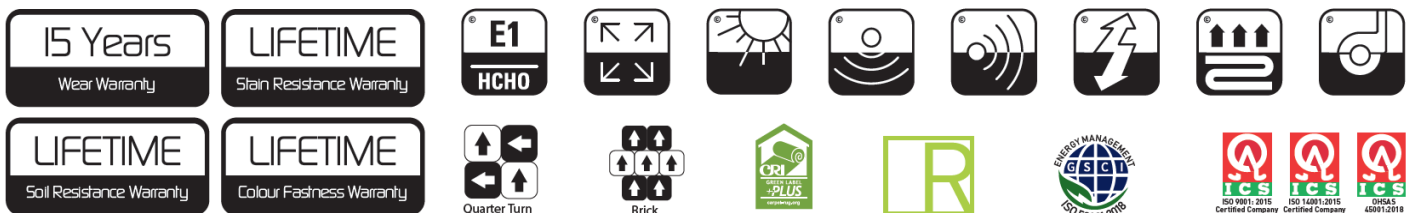

Auckland Design Hub: 55A Barrys Point Road, Takapuna, Auckland, 0622
Christchurch Design Hub: 41 Welles Street, Christchurch Central, 8011
Warehouse: 24A Fremlin Place, Avondale, 1026

09 444 4165 | salesoffice@projectfloors.co.nz