



Project Floors NZ Ltd
55 Barrys Point Road, Takapuna, Auckland 6022
41 Welles Street, Christchurch Central 8011
www.projectfloors.co.nz Tel: 09 444 4165
Email: salesoffice@projectfloors.co.nz



PROJECTFLOORS





Iridescent 3




Tranquility 2







Creativity
is more than
just being
different.
Making the
simple,
awesomely
simple,
that's
creativity.

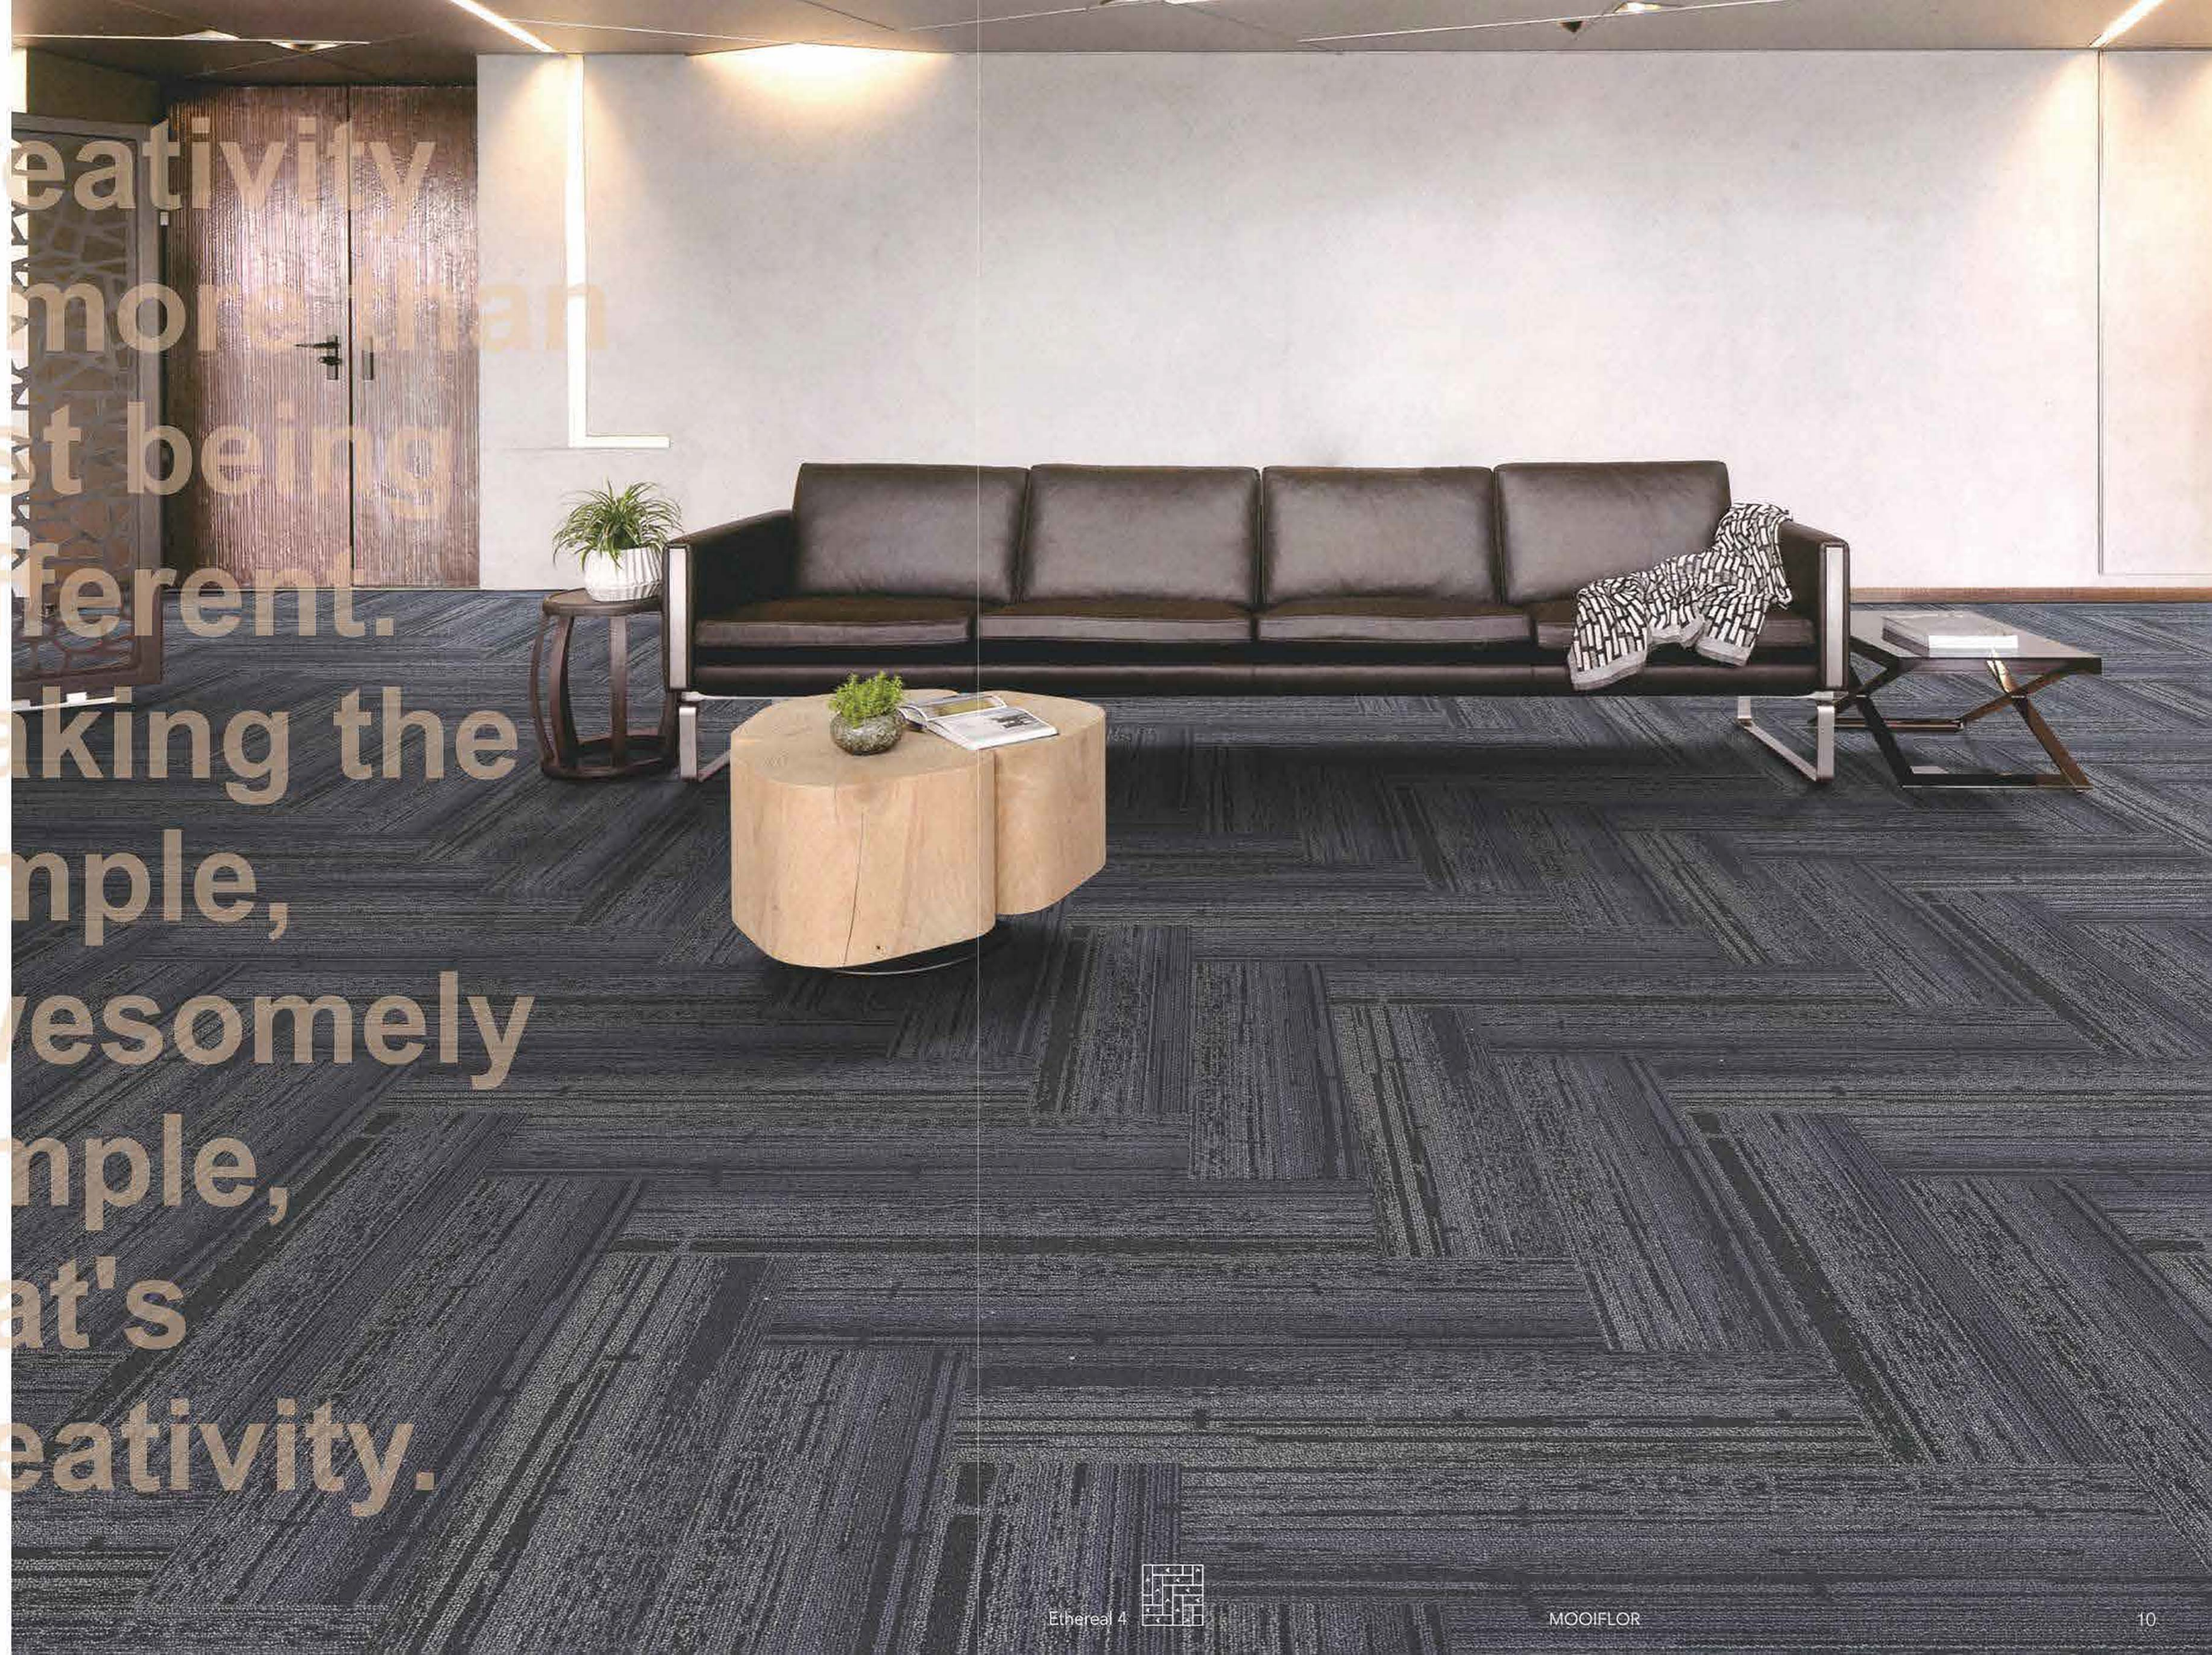


TRANQUILITY SERIES IJ



Tranquility 1



Tranquility 2

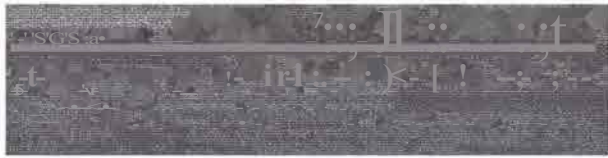

Tranquility 3



Tranquility 4

ETHEREAL SERIES Iftn



Ethereal 1



Ethereal 2



Ethereal 3



Ethereal 4


IRIDESCENT SERIES I



Iridescent 1




Iridescent 3

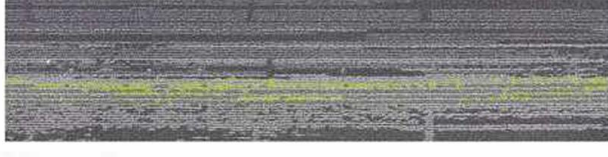


Iridescent 5



Iridescent 7

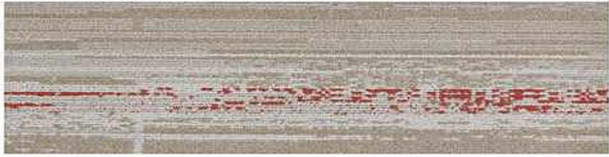

Iridescent 2

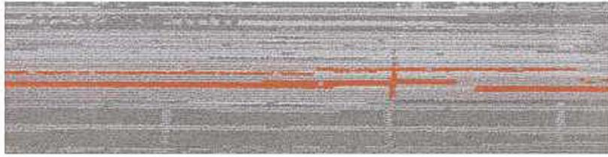

Iridescent 4



Iridescent 6



Iridescent 8

Style Name: Tranquility
Construction: Multi-level loop
Yarn: 100% Universal Nylon 6
Color System: 100% Solution Dyed
Gauge: 1/12
Stitches: 11 per inch
Pile Weight: 20 oz/yd'
Pile Height: 2.5mm-4.5mm (±0.5mm)
Backing: PVC with fiberglass
Tile Size: 25cmx100cm
Area of Use: Heavy Commercial
Flammability: Passes (ASTME648-10) Class I
Passes (GB 8624-2012) 8I
Smoke Density: Passes ASTM E 662 Less than 450
Static Propensity: Passes AATCC-134, a, ;, 3.skV
Static Control: Life-of-the carpet Static Protection

Style Name: Ethereal
Construction: Multi-level loop
Yarn: 100% Universal Nylon 6
Color System: 100% Solution Dyed
Gauge: 1/12
Stitches: 11 per inch
Pile Weight: 18 oz/yd'
Pile Height: 3.0mm-5.5mm (±0.5mm)
Backing: PVC with fiberglass
Tile Size: 25cmx100cm
Area of Use: Heavy Commercial
Flammability: Passes (ASTME648-10) Class I
Passes (GB 8624-2012) 8I
Smoke Density: Passes ASTM E 662 Less than 450
Static Propensity: Passes AATCC-134, ;, ;, 3.5kV
Static Control: Life-of-the carpet Static Protection

Style Name: Iridescent
Construction: Multi-level loop
Yarn: 100% Universal Nylon 6
Color System: 100% Solution Dyed
Gauge: 1/12
Stitches: 11 per inch
Pile Weight: 18 oz/yd'
Pile Height: 3.0mm-5.5mm (±0.5mm)
Backing: PVC with fiberglass
Tile Size: 25cmx100cm
Area of Use: Heavy Commercial
Flammability: Passes (ASTME648-10) Class I
Passes (GB 8624-2012) 8I
Smoke Density: Passes ASTM E 662 Less than 450
Static Propensity: Passes AATCC-134, ;, ;, 3.5kV
Static Control: Life-of-the carpet Static Protection

INSTALLATION METHODS

